
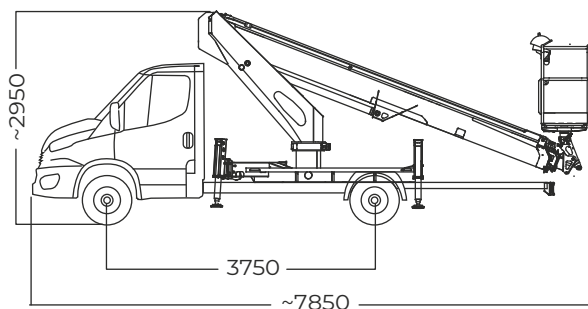


WORKING DIAGRAM

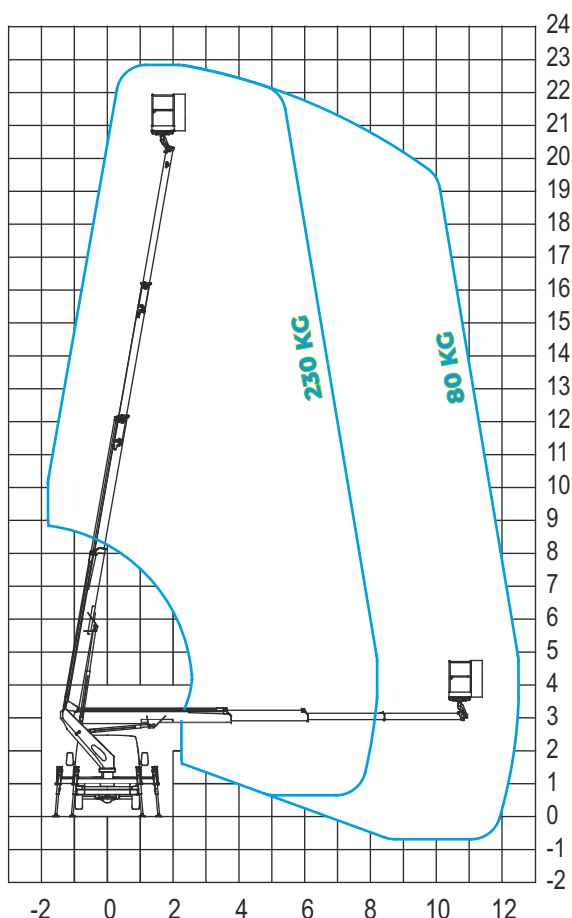

INFO

- OUTRIGGERS**
HE+H
- WORKING HEIGHT**
22,80 m
- BASKET HEIGHT**
20,80 m
- MAX OUTREACH**
12,50 m
- BASKET LOAD CAPACITY**
230 kg
- BASKET SIZE**
1400x700x1100 mm
- BASKET ROTATION**
90° + 90°
- CONTROLS**
Electric
- TURRET ROTATION**
700°
- GVW**
3,5 ton

STANDARD ACCESSORIES

The **AUTOMATIC** function is a new solution present in Aerial Working Platforms on Chassis. It brings great advantages including increasing safety and facilitating the correct use of the necessary stabilization maneuver to start working. With a single button, even from the basket, it allows to obtain stabilization in a safe, simple and fast way, quickly overcoming the irregularities of the ground.


DATA SHEET

- Cables and hoses installed inside the boom
- **AUTOMATIC closing**
- **AUTOMATIC stabilization from the basket and from the ground**
- Proportional electro-hydraulic controls with regulation of the speed of all movements
- Electronic safe system CAN BUS
- 4 outrigger plates
- Socket 230V and 12V in the basket
- Possibility of simultaneous movements
- Automatic regulation of engine revolutions
- Cataphoresis treatment with powder coating
- Aerial part centering light on the basket


SAFETY DATA

- **Security System**
- Unintentional maneuver protection bar
- Controls protection of the basket
- Circuit braker with differential protection on the 230V line
- Safety bypass for operator rescue
- Moment limiting device with double security
- Self levelling system for the basket
- Inclinometer
- Flanged block valves
- Emergency button
- Emergency manual hand pump
- Possibility emergency remote rescue
- Automatic PTO deactivation
- Smart anti crash cab protection
- Digital hour-counter
- Cab light closed outriggers
- Maintenance light (Service)

MAX STABILISATION



BLOCKED AREA



STABILIZZAZIONE MIN.