


WORKING DIAGRAM



INFO

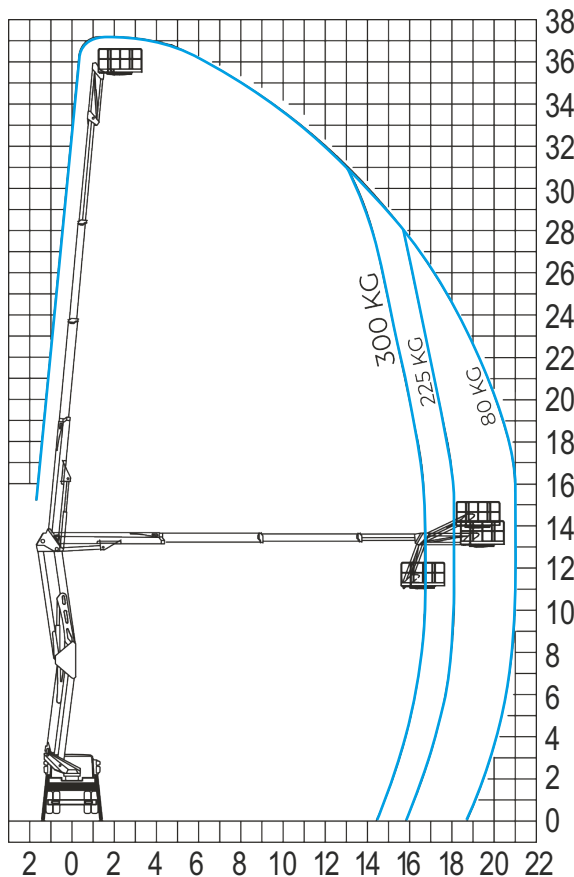

OUTRIGGERS
H+H



WORKING HEIGHT
37,30 m



BASKET HEIGHT
35,30 m



MAX OUTREACH
21,00 m



BASKET LOAD CAPACITY
300 kg



BASKET SIZE
2000x800x1100 mm



BASKET ROTATION
90° + 90°



CONTROLS
Electric



TURRET ROTATION
700°



GVW
18 ton

STANDARD ACCESSORIES

The **AUTOMATIC** function is a new solution present in Aerial Working Platforms on Chassis.

It brings great advantages including increasing safety and facilitating the correct use of the necessary stabilization maneuver to start working. With a single button, even from the basket, it allows to obtain stabilization in a safe, simple and fast way, quickly overcoming the irregularities of the ground.



DATA SHEET

- **AUTOMATIC closing**
- **SUTOMATIC stabilization from the basket and from the ground**
- Proportional electrohydraulic controls with
- regulation of the speed of all movements
- Double or triple working area depending on
- the installation
- Articulated final jib
- Electronic safe system CAN BUS
- Engine start/stop from the basket
- Heat exchanger
- 4 outrigger plates
- Socket 230V
- Magnetic roto-lamp on the vehicle cabin
- Cataphoresis treatment with powder coating
- Aerial part centering light on the basket
- Tool trunk
- Under-run
- 150 mm aluminum side rails
- LED rear bumper lights
- LED rotating beacon on truck cab

SAFETY DATA

- Emergency button
- Emergency manual hand pump
- Cross-check of open stabilizers
- Multi-axial device for visual control of frame stabilization
- Intelligent cabin anti-collision sensor
- Load limiter in the basket
- Moment limiting device with double security
- Chassis flatness sensor
- Flanged block valves
- Differentiated filtering hydraulic system with
- high efficiency filters both on the delivery lines and on the return lines
- Automatic basket leveling
- Automatic PTO deactivation
- Warning horn from the basket
- SW Safe Workplace safety lights on the aerial part

MAXIMUM AREA

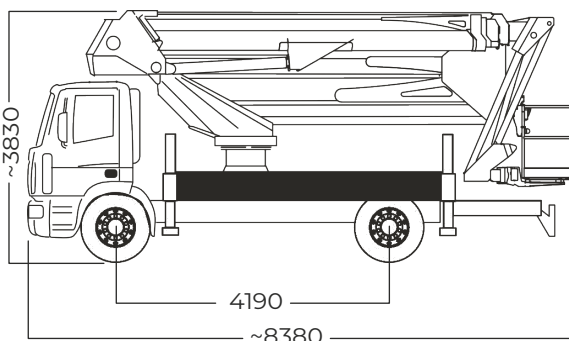

IVECO EUROCARGO