

CTE TRACCESS 135

↑ 13 m

→ 6,5 m

👤 200 kg

A white CTE TRACCESS 135 aerial work platform is shown in operation. The boom is extended high into the air, reaching over a dense line of green trees. A worker in a safety harness and helmet is visible in the platform basket. The base of the machine is on a grassy area, with a metal fence and a concrete wall in the background. The machine has 'CTE TRACCESS 135' and 'STRONG' printed on its boom.

Remarkable productivity.

Compactness.
Ease of use.
Versatility.

CTE TRACCESS 135

It reaches 13 m in height with an unrestricted working area that allows you to operate with maximum outreach at maximum capacity.



Unrestricted working area



Compactness



Clean top boom

TECHNICAL DATA

- » Single-section articulated boom + telescopic boom (base + one extension) + jib
- » 320° turret rotation on slewing ring
- » Individual hydraulic controls from the basket in vertical position
- » Engine start/stop from the basket
- » All-aluminium basket (dimensions 1.4x0.7x1.1m)
- » Basket rotation +/-90°
- » Hydraulic parallelogram basket levelling
- » Load cell for basket load control
- » 4 hydraulic stabilisers with ground contact sensors
- » Extendable undercarriage
- » Undercarriage lowering
- » 230 V AC CE socket in basket
- » Maximum climbability 31%
- » Maximum travel speed 1.5 km/h
- » Electro-hydraulic travel steering from the ground with remote control with spiral cable
- » 1.5 kW, 230 V auxiliary motor
- » Hour meter
- » Standard paint finish blue (RAL 5017) or white (RAL 9003)
- » EN 280:2022 certification

ENGINES

- » Honda 15 Hp petrol
- » Lombardini diesel



watch the video

STRENX[™]
PERFORMANCE STEEL




ACCESS IN
CONFINED SPACES

WIRED REMOTE CONTROL



CLEAN TOP BOOM

STABILITY AT HEIGHT

WORKING ENVELOPE


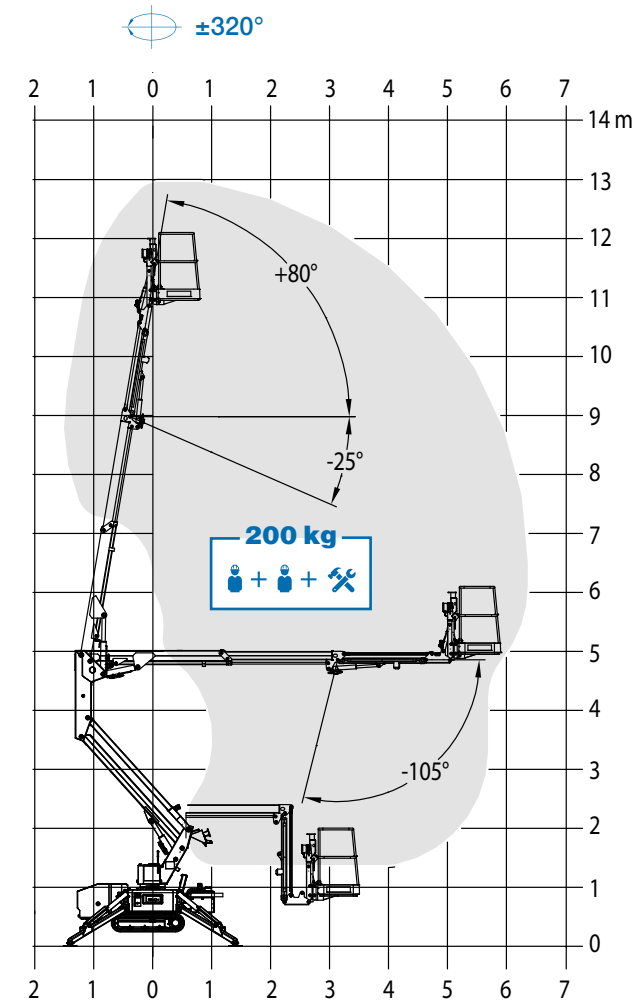


DIMENSIONS

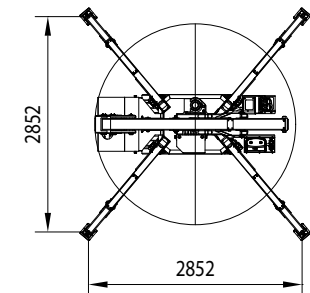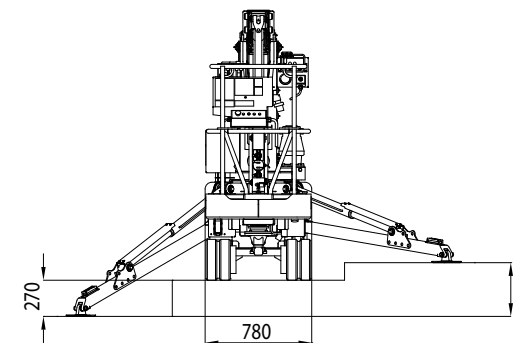

	13* m		130 x 78 x 110 cm
	6,5* m		1.600 kg
	200 kg		11* m


OUTRIGGER FOOTPRINT

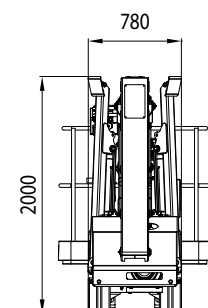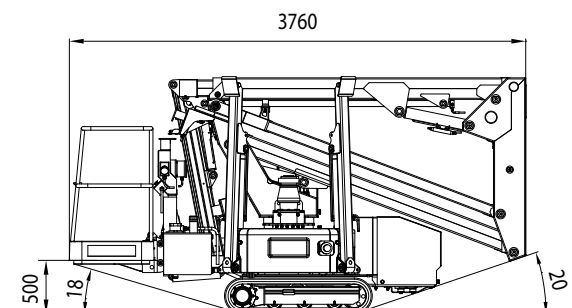

* outreach and height max values and repeatability can change within ± 3% due to manufacturing variation and working condition.



Track-mounted range from 13 m to 27 m

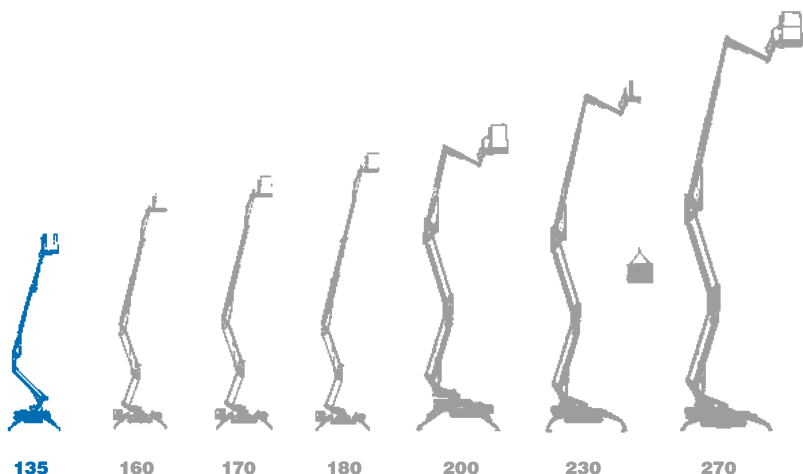

- ★ Most versatile boom configuration
- ★ Most compact machines in class
- ★ Clean top boom
- ★ Friendly to use intuitive controls
- ★ Easy maintenance
- ★ Excellent boom rigidity during operation
- ★ Versatility of engines and versions



**We are CTE, one of the largest
european groups in the field of
lifting people and handling of material.**



**After sales
assistance**



**Service
spare parts**



**Scheduled
maintenance**



**On-site
assistance**



**Authorized
workshops**

Efficient services, innovative technical solutions, timely assistance, professional advice and training:
CTE is all this.

A style, a philosophy at the heart of which are our customers, their
safety, their quality of life. For this reason there is a group in CTE united by ideas, motivation and
passion to simplify the work of companies active in the lifting of people and objects.

CTE S.p.A.

Località Terramatta 5
37010 Rivoli Veronese (VR) IT
Ph. +39 0464 48.50.50
info@ctelift.com
www.ctelift.com



CTE UK Ltd

Enderby Leicestershire - UK

CTE LIFT FRANCE Sas

Heillecourt - FR

CTE NA Corp

Willington - CT - USA

